




**SOLARSHIELD**  
*Solutions for Glazing*

**Renewable Energy Division**  
**3M™ Sun Control Window Film Prestige 90**

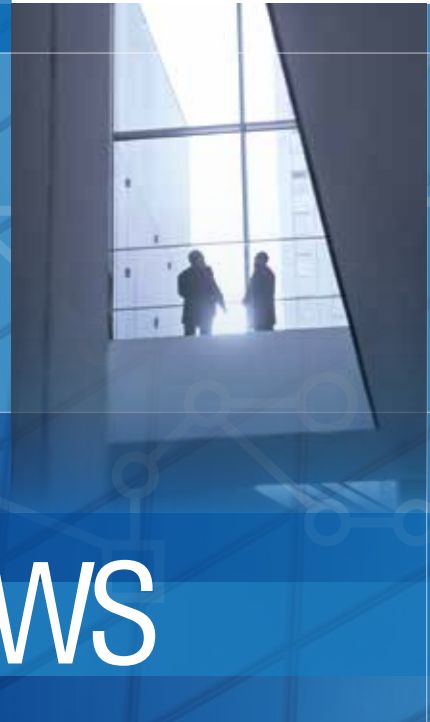

# Making your Windows work for you



## 3M™ Sun Control Window Film Prestige 90

- Spectrally selective, multilayer nano-technology
- Reduces solar heat gain keeping occupants cool and comfortable
- Reduces the reflection on the glass
- Reduces heating and cooling costs
- Extends the life and vibrancy in furniture, fittings and fabrics
- Reduces the risk of injury from flying glass

**3M**


# 3M™ Sun Control Window Film Prestige 90

## Description

With 3M's Prestige Series you can enjoy the benefits of a world-class window film while leaving the window appearance virtually unchanged. Prestige Series nano-technology can significantly reduce heat gain and create a comfortable environment, as well as helping to reduce the workload of air conditioners and save energy costs. Because the films use no metal, they are not susceptible to corrosion, plus Prestige Series Window Films offer reflectivity that is actually lower than glass.

**Prestige 90** is a multi layer and metal free film based on nanotechnology. It has a uniquely high visual light transmission for a film that has exceptionally high heat rejection capabilities. The film also blocks almost the entire amount of UVA and UVB rays which are the main cause of fading and skin damage. The patented multi layer construction and manufacturing process guarantees a high quality and an even longer warranty and life expectancy compared to other exterior film technologies.

## Solar Performance and light transmission

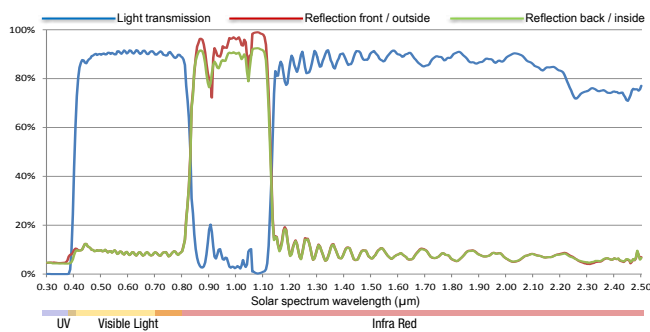

## Features (on 6 mm clear glass)

Total Solar Energy Rejected	36%
Near IR reduction	97%
UV rays blocked	99.9%

## Film properties

Thickness without adhesive	0.058mm / 58µm
Colour	Clear
Material	Co-extruded PET/coPMMA
Adhesive	Pressure sensitive acrylic
Top coating	Scratch resistant hard coat

## Installation

**Prestige Series** films are installed using water and a soap solution. They are faster drying than other films, resulting in a faster installation time. Full adhesion is reached after approximately 8 - 10 days at 18°C (in dry conditions). Edge sealing of Prestige Exterior Series is not required on vertical applications, except where moisture can pool/ accumulate for an extended time. Edge sealing on horizontal / sloped applications is recommended. A recommended edge sealant is 3M™ Marine Sealant 3200.

## Cleaning

3M Window Films may be cleaned 30 days after installation using ordinary window cleaning agents and avoiding the use of abrasive particles. Do not use rough sponges, cloths or brushes. Synthetic sponges, soft wipes or rubber squeegee cleaners are recommended.

Glass Type	Film Type on 6mm Glass	Visible Light Transmission	Visible Reflection Exterior	Visible Reflection Interior	Heat Gain Reduction	G-value (Solar Heat Gain Coefficient)	Total Solar Energy Rejected
<b>Single Pane</b>							
Clear	No film	89%	8%	9%	N/A	0.82	19%
	<b>PR 90</b>	<b>88%</b>	<b>9%</b>	<b>9%</b>	<b>21%</b>	<b>0.64</b>	<b>36%</b>
Tinted	No film	53%	6%	6%	N/A	0.63	37%
	<b>PR 90</b>	<b>53%</b>	<b>6%</b>	<b>6%</b>	<b>21%</b>	<b>0.50</b>	<b>50%</b>
<b>Double Pane</b>							
Clear	No film	79%	15%	15%	N/A	0.70	30%
	<b>PR 90</b>	<b>78%</b>	<b>15%</b>	<b>16%</b>	<b>21%</b>	<b>0.56</b>	<b>45%</b>
Tinted	No film	47%	8%	13%	N/A	0.51	49%
	<b>PR 90</b>	<b>47%</b>	<b>9%</b>	<b>13%</b>	<b>20%</b>	<b>0.41</b>	<b>60%</b>

The technical information, recommendations and other statements contained in this document are based upon European and/ or US tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed. Many factors beyond 3M's control and uniquely within the user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, the user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. The information provided in this report is believed to be reliable; however, due to the wide variety of intervening factors, 3M does not warrant that the results will necessarily be obtained. All issues regarding warranty and liability for the product and the effect of its use are governed in accordance with the provisions of the appropriate contract of sale unless local laws dictate otherwise.

## 3M UK 3M Premier Window Film Dealer

Solarshield Limited  
 Canada House  
 20/20 Business Park  
 St Leonards Road  
 Maidstone  
 Kent  
 ME16 0LS  
 t-0845-1306232  
 e-info@solarshield.co.uk  
 w-www.solarshield.co.uk



**SOLARSHIELD**  
 Solutions for Glazing